



# SEIKOH GIKEN





## New MT Final Film FM5D-SOAP-2

### ■ Features

- Achieve Core dip <50nm in M/M OM3/4 polishing
- Scratch and Pits are minimized without use of slurry

### ■ Performance

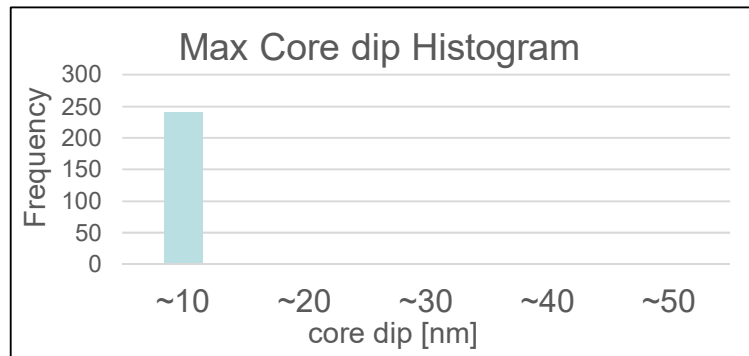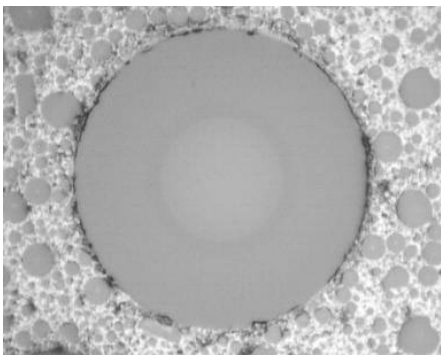

Polishing Step	1	2	3	4	5
Polishing Pad	PG5X-490-SR3				
Polishing Film (service life)	GC5D(1)	AR5D(1)	GH5D(1)	FM5D-SOAP-2(1)	
Polishing Liquid	PURIFIED WATER				
1st Step Mode	Pressure Ramp UP	N/A	N/A	N/A	N/A
Turntable speed(rpm)	110	110	110	110	110
PolishingTime (sec)	30	90	60	60	150
Pressure(N)	84 (24-axis) , 42 (12-axis)				

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

#### North America

Atlanta, Georgia  
Tel: +1-770-279-6602  
Fax: +1-770-279-8839  
[sales@sg-usa.com](mailto:sales@sg-usa.com)

#### Europe

Frankfurt, Germany  
Tel: +49-6102-297-701  
Fax: +49-6102-297-750  
[info@sg-euro.de](mailto:info@sg-euro.de)

#### Asia

Matsudo, Japan  
Tel: +81-47-388-6111  
Fax: +81-47-388-4477  
[sales.div@seikoh-giken.co.jp](mailto:sales.div@seikoh-giken.co.jp)

#### China

Hangzhou, PROC  
Tel: +86-571-8777-4098  
Fax: +86-571-8777-4099  
[sales@seikoh-giken.net](mailto:sales@seikoh-giken.net)

Seikoh Giken reserves the right to improve, enhance and modify features and specifications of Seikoh Giken products without prior notifications