




SEIKOH GIKEN

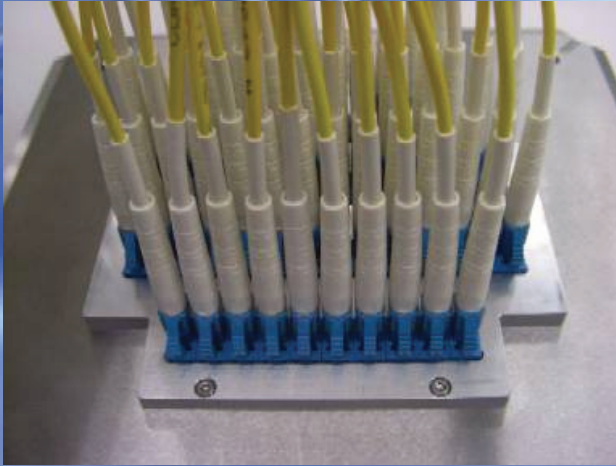

48ch Mega-Axis LC Polishing

■ Features

- Suitable to polish rack mount patch cables (Multiple of 12pcs)
- Duplex LC connector compatible;
Holder adaptor pitch is same as duplex LC connector (2x16 = 32ch for clip type)
- Drastic reduction in man hour
(finish same amount of polishing work in almost 50% less time compared to 24 axis)
- Drastic reduction in cost per termination
(approx 50% consumables cost reduction compares to 24 axis holder)

■ Application


Polishing Machine: SFP-550 series / Polishing Holder: PH55-PL8A-48N

Reference Polishing Process	Polishing Condition for APC			
	Pad	Film (life)	Polishing Liquid	Time (min.)
Adhesive Removal	PR5X-500-70	DA5D (30)	Purified Water	0.5 to 1.0
First Polishing	PR5X-500-70	DR5D-9U (30)	Purified Water	0.5
Second Polishing	PR5X-500-70	DJ5D-1U (15)	Purified Water	1.0
Final Polishing	PR5X-500-70	XF5D (5)	Purified Water	1.0







Polishing Machine: SFP-550 series / Polishing Holder: PH55-PL-48N

Reference Polishing Process	Polishing Condition for PC			
	Pad	Film (life)	Polishing Liquid	Time (min.)
Adhesive Removal	PR5X-500-90	GA5D (5)	None	0.5
First Polishing	PR5X-500-85	DH5D-3U (20)	Purified Water	1.0
Second Polishing	PR5X-500-85	DJ5D-1U (15)	Purified Water	1.0
Final Polishing	PR5X-500-85	XF5D (5)	Purified Water	1.0







Polishing Performance

Simplex LC Connectors (Full 48 channels are used)

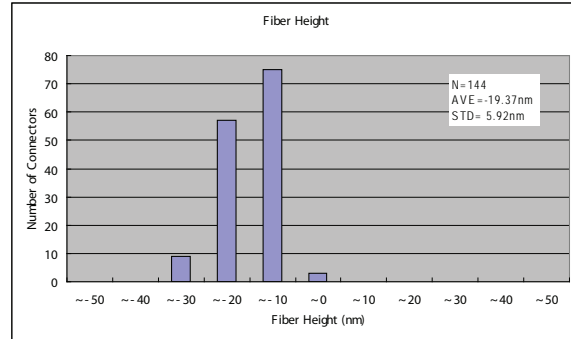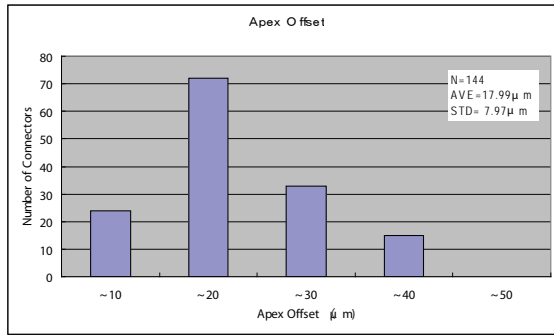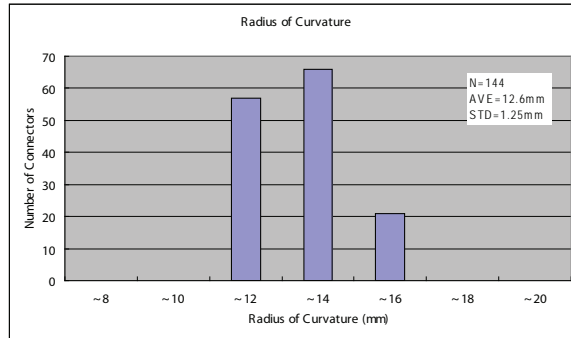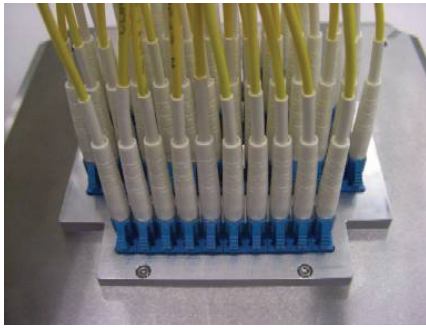

Polishing Performance of Duplex LC Connectors (32 channels are maximum = 16 Duplex LC Connectors)

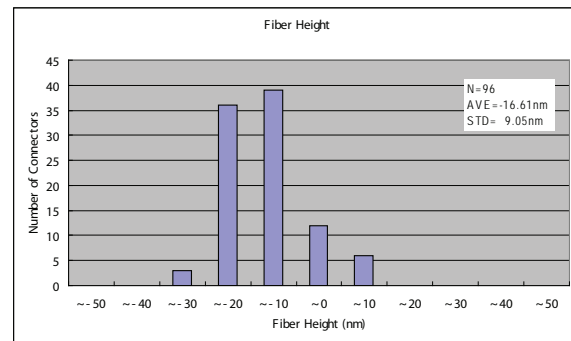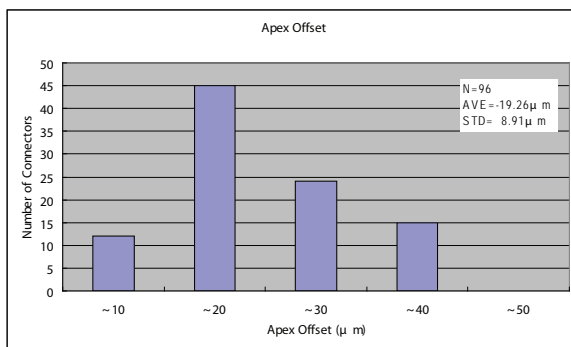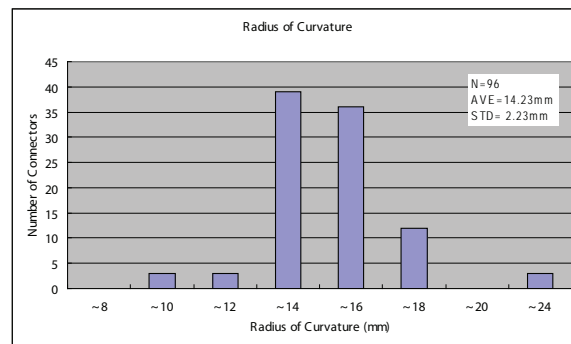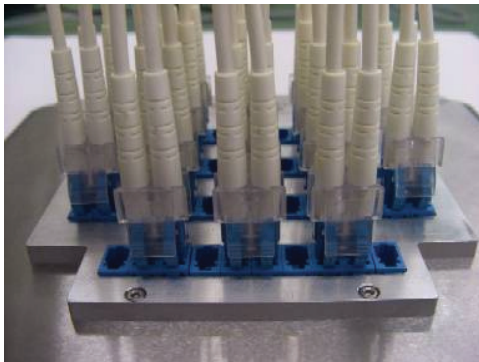

WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

USA

SEIKOH GIKEN USA, Inc.
Atlanta, Georgia
Tel: +1-770-279-6602
Fax: +1-770-279-8839
sales@sg-usa.com

Europe

SEIKOH GIKEN Europe GmbH
Frankfurt, Germany
Tel: +49-6102-297-701
Fax: +49-6102-297-750
info@sg-euro.de

Asia

SEIKOH GIKEN Co., Ltd.
Chiba, Japan
Tel: +81-47-388-6111
Fax: +81-47-388-4477
sales.div@seikoh-giken.co.jp

